


Technische Daten RGB 3er Modul

<http://shop.almak.at/de/RGB3>

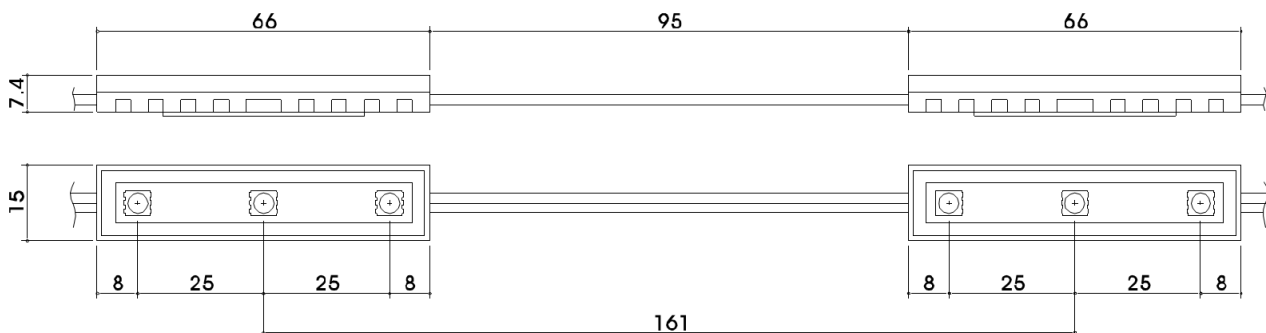

Products No.	RGB4 (Square Type)	RGB3 (Bar Type)
Operating Power	DC12V	
Power / Current Dissipation	1.2W, 100mA	0.72W, 60mA
Max. connection in series	50 modules	
LED Spec	120° Viewing angle, 50,000hr rated life, made in Korea	
Dimensions	45L*45W*8H mm	66L*15W*7H mm
Luminous intensity(cd)	R:2400/ G:4800/ B:1200	R:1800/ G:3600/ B:900
Dominant Wavelength	R:625 / G:525/ B:465	R:625 / G:525/ B:465
Module connection & Cuttability	Wire to Wire (series connection)	
Operating Temperature	-20°C~ 60°C	
Storage Temperature	-30°C~ 70°C	
Waterproofing rate	IP68	
Case Materials	ABS housing + Epoxy treatment	

Diese RGB Module sind mit Strombegrenzer und Spannungsstabilisatoren ausgestattet und sind nach IP68 vollkommen gegen Staub und Wasser geschützt.